




### Product Size

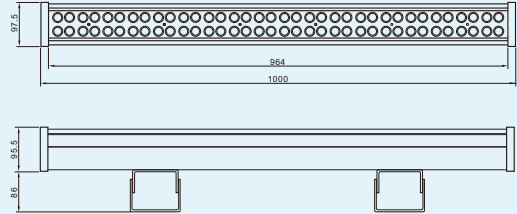

### Specification

<b>Model No.:</b>	RS-WW162W-C(88310) / RS-WW216W-C(88310)
<b>Front cover &amp; Housing:</b>	Aluminum body
<b>Dimensions:</b>	L1000*W98*H95mm(H180mm with bracket)
<b>Tempered Glass:</b>	4mm thickness
<b>LED chip:</b>	Epistar
<b>LED Q'ty:</b>	54pcs 3W LED / 72pcs 3W LED
<b>Cable gland:</b>	Nickel plated brass PG9
<b>Driver:</b>	Constant current driver
<b>Lens:</b>	Clear, Bead, Frosted
<b>Beam Angle Options:</b>	10° 30° 45° 60° 90°
<b>Power Cable:</b>	2*1.0mm <sup>2</sup> / 3*0.75mm <sup>2</sup> / 4*0.75mm <sup>2</sup> / 2*1.0mm <sup>2</sup> +3*0.75mm <sup>2</sup> VDE rubber cable
<b>Protection Class:</b>	IP65
<b>Environment:</b>	Dry
<b>Mounting Hardware:</b>	Wall Mounted System
<b>Net Weight:</b>	6.8kgs with 1m cable
<b>Lifetime:</b>	>50000H

### Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88310.543.01	2700-3000K	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	7560
88310.543.02	4000-4500K	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	7992
88310.543.03	5000-5500K	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	8370
88310.543.04	6000-6500K	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	8370
88310.543.05	Red	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 490-980	108	1890
88310.543.06	Green	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	4860
88310.543.07	Blue	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	2160
88310.543.08	Yellow	54*3	V+/V- or L/N/G	DC36, AC90-230	4500 / 736-1472	162	5130
88310.543.09	RGB-DMX512 (3 channel)	54*3	V+/V- /D+/D-/GND	DC36	R: 1000 B: 1500 G: 1500	R: 36 B: 54 G: 54	R: 630 B: 720 G: 1620
88310.543.12	RGBV+ (build-in CC driver)	54*3	R/G/B/V+	DC36	R: 1000 B: 1500 G: 1500	R: 36 B: 54 G: 54	R: 630 B: 720 G: 1620
88310.723.13	RGBW-DMX512 (4 channel)	72*3	V+/V- /D+/D-/GND	DC36	R: 1000 B: 1500 G: 1500 W: 1500	R: 36 B: 54 G: 54 W: 54	R: 630 B: 720 G: 1620 W: 2520

