




Product Size

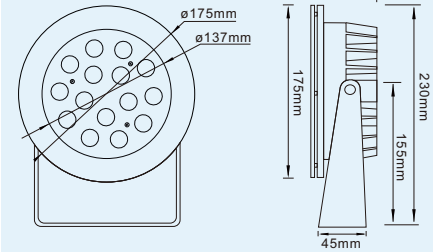

Specification

Model No.:	RS-UW45W316X(88107) / RS-UW64W316X(88107)
Front cover & Housing:	Stainless steel 316L
Dimensions:	D175*H230mm(Max.)
Tempered Glass:	8mm thickness
LED chip:	CREE / EDISON
LED Q'ty:	15pcs 3W LED / 15pcs 3in1 LED / 16pcs 4in1 LED
Cable gland:	Stainless steel 316L PG13.5
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 20° 30° 45° 60° 90°
Power Cable:	AWG 5/18 or AWG 3/18 SOW rubber cable
Protection Class:	IP68
Environment:	Dry / Submerged
Mounting Hardware:	Surface Mounted System
Net Weight:	4kgs with 1.5m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88107.153.01	2700-3000K	15*3	V+/V-	AC/DC24	1875	45	2100
88107.153.02	4000-4500K	15*3	V+/V-	AC/DC24	1875	45	2220
88107.153.03	5000-5500K	15*3	V+/V-	AC/DC24	1875	45	2325
88107.153.04	6000-6500K	15*3	V+/V-	AC/DC24	1875	45	2325
88107.153.05	Red	15*3	V+/V-	AC/DC24	1250	30	525
88107.153.06	Green	15*3	V+/V-	AC/DC24	1875	45	1350
88107.153.07	Blue	15*3	V+/V-	AC/DC24	1875	45	600
88107.153.08	Yellow	15*3	V+/V-	AC/DC24	1875	45	1425
88107.153.09	RGB-DMX512 (3 channel)	15*3	V+ /V- /D+ /D- /GND	DC24	R: 415 B: 625 G: 625	R: 10 B: 15 G: 15	R: 175 B: 200 G: 450
88107.153.10	RGB-DMX512 (3 channel)	15*3in1	V+ /V- /D+ /D- /GND	DC24	R: 625 B: 625 G: 625	R: 15 B: 15 G: 15	R: 375 B: 450 G: 900
88107.153.11	Auto changing color	15*3	V+/V-	AC24	R: 415 B: 625 G: 625	R: 10 B: 15 G: 15	R: 175 B: 200 G: 450
88107.153.13	RGBV+ (build-in CC driver)	15*3	R/G/B/V+	DC24	R: 415 B: 625 G: 625	R: 10 B: 15 G: 15	R: 175 B: 200 G: 450
88107.164.14	RGBW-DMX512 (4 channel)	16*4in1	V+ /V- /D+ /D- /GND	DC24	R: 666 B: 666 G: 666 W: 666	R: 16 B: 16 G: 16 W: 16	R: 400 B: 480 G: 960 W: 1440

