




Product Size

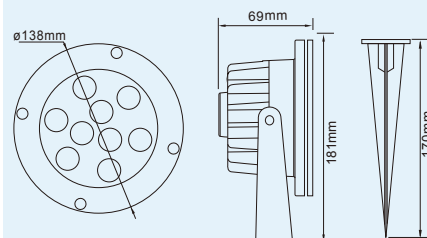

Specification

Model No.:	RS-GS9W(88428)
Front cover & Housing:	Aluminum body
Dimensions:	D138*H351mm
Tempered Glass:	8mm thickness
LED chip:	Epistar
LED Q'ty:	9pcs 1W LED
Cable gland:	Nickel plated brass PG9
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 30° 45° 60° 90°
Power Cable:	2*1.0mm ² / 3*0.75mm ² / 4*0.75mm ² / 2*1.0mm ² +3*0.75mm ² VDE rubber cable
Protection Class:	IP65
Environment:	Dry
Mounting Hardware:	Floor
Net Weight:	1.05kgs with 1m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88428.091.01	2700-3000K	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	810
88428.091.02	4000-4500K	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	855
88428.091.03	5000-5500K	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	900
88428.091.04	6000-6500K	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	900
88428.091.05	Red	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	225
88428.091.06	Green	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	540
88428.091.07	Blue	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	270
88428.091.08	Yellow	9*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	750 / 375 / 40-48	9	630
88428.091.09	RGB-DMX512 (3 channel)	9*1	V+/V- /D+/D-/GND	AC/DC12	R: 250 B: 250 G: 250	R: 3 B: 3 G: 3	R: 75 B: 90 G: 180
88428.091.10	Auto changing color	9*1	V+/V-	AC12	R: 250 B: 250 G: 250	R: 3 B: 3 G: 3	R: 75 B: 90 G: 180
88428.091.12	RGBV+ (build-in CC driver)	9*1	R/G/B/V+	DC12	R: 250 B: 250 G: 250	R: 3 B: 3 G: 3	R: 75 B: 90 G: 180

