


USER OF DMX CODER

Picture:

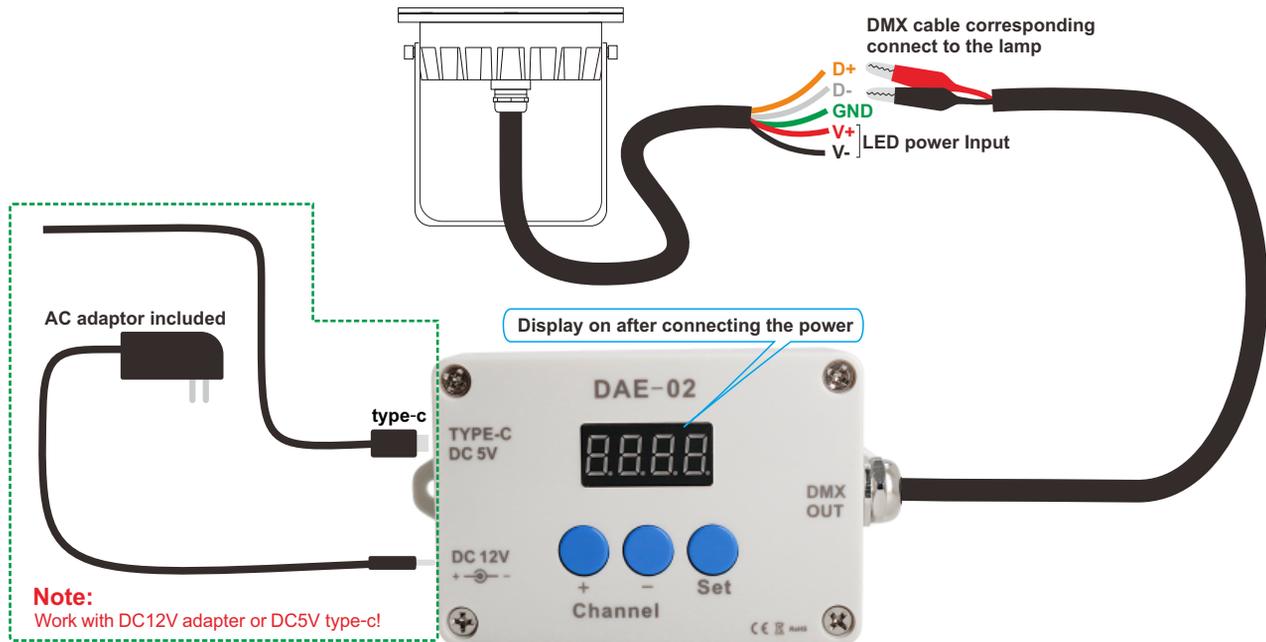

Setup process:

1. Work with DC12V adapter or DC5V type-c.
2. Connect with DMX light from “DMX OUT” side.
3. Connect with DC12V adapter or DC5V Type-C, the display will be bright.
4. Push Channel button “+” or Channel button “-” to give address No. to DMX light. Then push button “Set” to fix the address No.
5. Use your DMX controller to connect with DMX light that has address No. to test the address.
6. You can see above waying to reset address for DMX lights.
7. This is sole coder for DMX light to set adress.

Attention:

The lamp cable shall not exceed 40meters,if more than 40meters should use dmx amplifier for DMX address setting.